
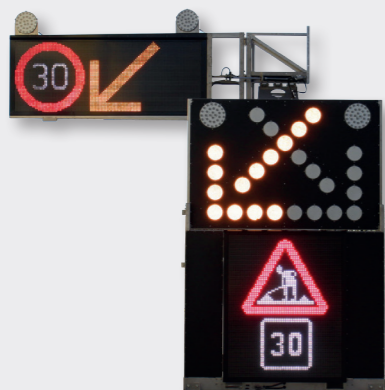



VMS Light Arrow System TMA Overhead

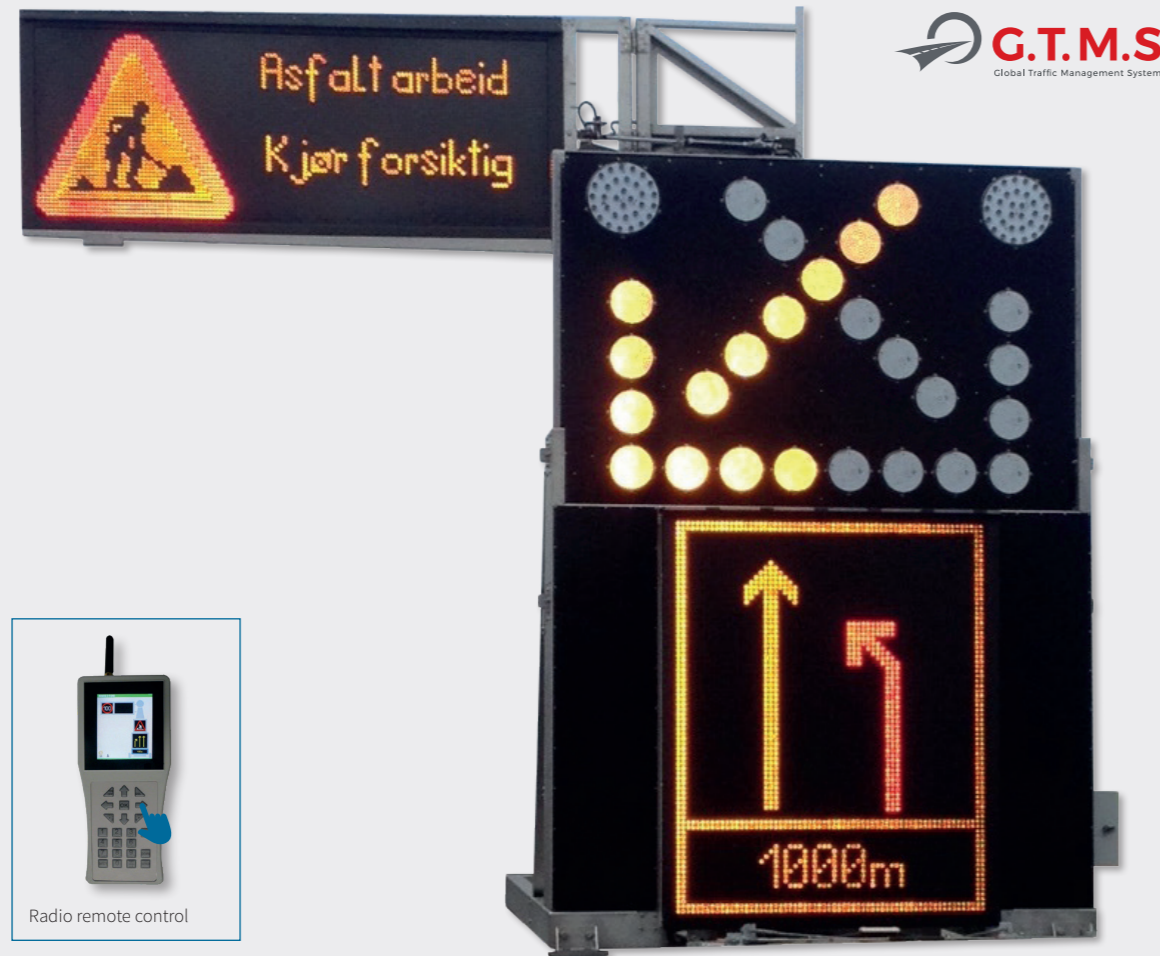

Display Options Light arrow

- Arrow pointing to the left or right (LED's amber)
- Cross (LED's amber)
- Warning lamps (LED's amber)

FULL MATRIX FOR DISPLAYING FREELY PROGRAMMABLE STATIC OR DYNAMIC TEXTS, SYMBOLS AND ANIMATIONS.



TECHNICAL DETAILS	GENERAL
Weight	Approx. 1.200 kg
System	Stainless steel/aluminium/galvanized
Battery box	Stainless steel
Charging device	Inclusive
Batteries	Inclusive
Lifting device	Hydraulic
Voltage	12 V
Control system	Mounted on the back side
Hydraulic system	For controlling a TMA

TECHNICAL DETAILS	LED SCREEN ARM
Dimension (WxH)	3.240 x 1.150 mm
Resolution	128 x 48 px (P20)
LED colours	Amber, red/white, red/white/amber, RGB
Programming	Freely programmable
Night dimming	Automatic
Temperature range	-20 °C - +60 °C
Protection level	IP 54
Approvals	Optical performance acc. to EN-12966

TECHNICAL DETAILS	LED SCREEN
Dimension (WxH)	1.365 x 1.710 mm
Resolution	64 x 80 px (P20)
LED colours	Amber, red/white, red/white/amber, RGB
Programming	Freely programmable
Night dimming	Automatic
Temperature range	-20 °C - +60 °C
Protection level	IP 54
Approvals	Optical performance acc. to EN-12966

TECHNICAL DETAILS	LIGHT ARROW
LED lamps	25 pcs. LED lamps amber Ø 200 mm class L8H 2 pcs. LED lamps amber Ø 300 mm class L9H
Night dimming	Automatic
Approvals	Optical performance acc. to EN-12352

