


LED WARNING SYSTEMS (VMS) WITH LIGHTARROW FOR TMA'S


VMS Light Arrow System TMA Overhead

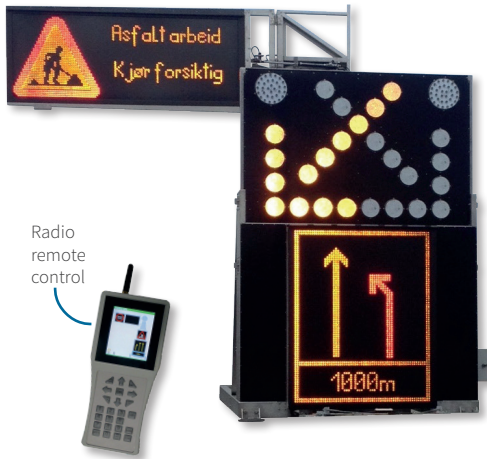

Technical details VMS Light Arrow System TMA Overhead

ITEM	VMS Light Arrow System TMA Overhead
Weight	Approx. 1.200 kg
System	Stainless steel/aluminium
Battery box	Stainless steel
Charging device	Inclusive
Batteries	Inclusive
Lifting device	Hydraulic
Voltage	12 V
Control	Mounted on the trailer
Hydraulic system	For controlling a TMA

Examples



Display options LED screen

- Fullmatrix, Freely programmable
- Display of symbols, text, animation

Display options Light arrow

- Arrow left/right (LED's amber)
- Cross for "Lane closed" (LED's amber)
- Warning lamps (LED's amber)

Technical details LED screen arm

ITEM	LED screen
Dimension (WxH)	3.240 x 1.150 mm
Resolution	128 x 48 px
LED colours	Amber, red/white, red/white/amber, RGB
Programming	Freely programmable
Night dimming	Automatic
Temperature range	-20 °C - +60 °C
Protection level	IP 54
Approvals	Optical performance acc. to EN-12966

Technical details LED screen

ITEM	LED screen
Dimension (WxH)	1.365 x 1.710 mm
Resolution	64 x 80 px
LED colours	Amber, red/white, red/white/amber, RGB
Programming	Freely programmable
Night dimming	Automatic
Temperature range	-20 °C - +60 °C
Protection level	IP 54
Approvals	Optical performance acc. to EN-12966

Technical details light arrow

ITEM	Light arrow
LED lamps	25 pcs. LED lamps amber Ø 200 mm class L8H 2 pcs. LED lamps amber Ø 300 mm class L9H
Night dimming	Automatic
Approvals	Optical performance acc. to EN-12352

