




# MobiLED Standard ESH

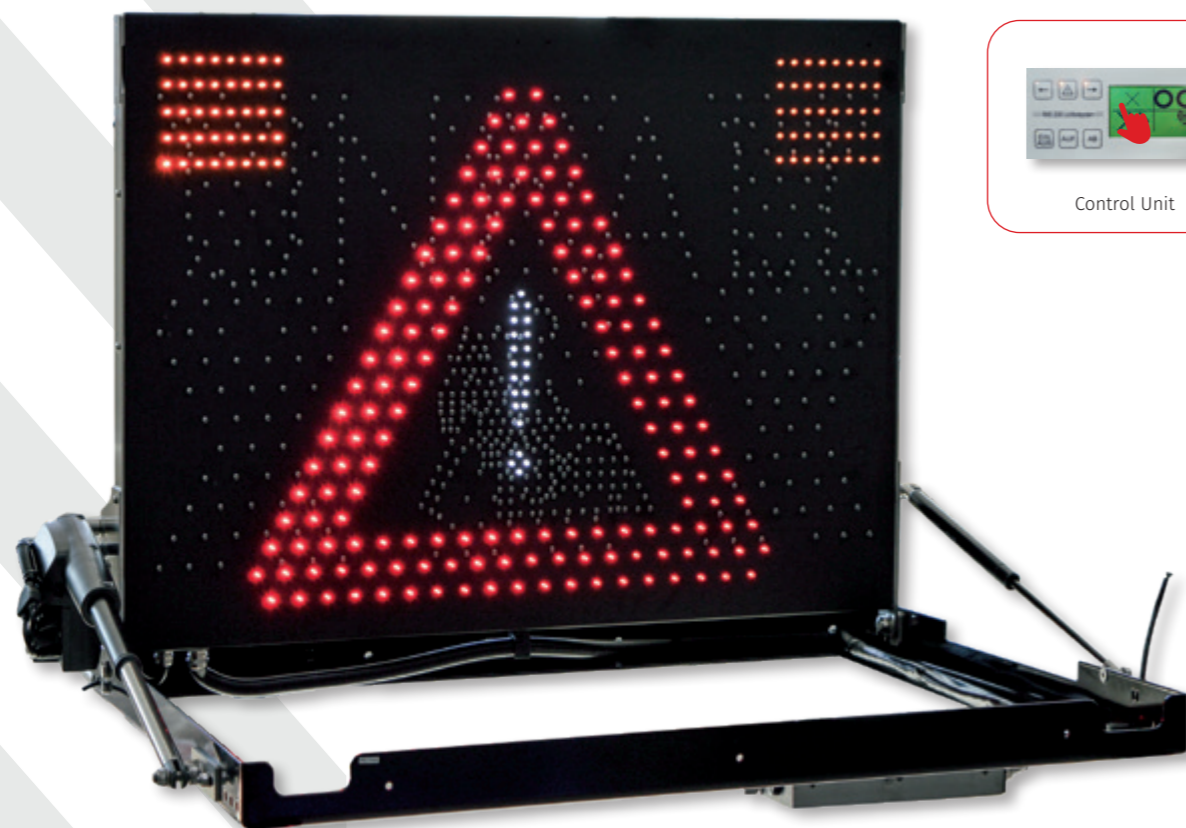

## Examples

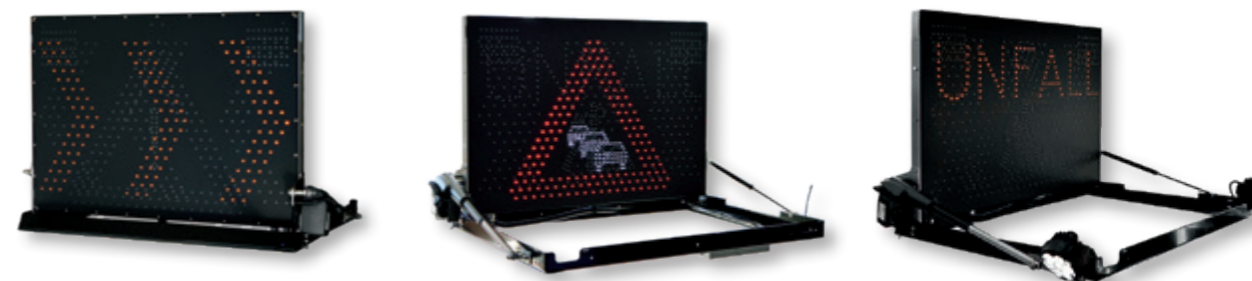

## LED Display options

- » 3-fold sequential arrow pointing to the left or right
- » Arrow pointing to the left and right
- » Traffic sign "Road Works Ahead"
- » Traffic sign "Attention"
- » Traffic sign "Queue Ahead"
- » 2 pcs. LED flasher synchro
- » Text "UNFALL" (Optional)

LED flasher available in amber or blue color (Choose when order)

# Technical Details

## Technical Details Roof Warning Systems

Design	Roof mount, incl. lifting motor
LED-screen	Single sided
Weight	approx. 30 kg
Power consumption (day)	approx. 4 A max
Power consumption (night)	approx 0,4 A
Voltage	12 V DC
Dimension LED Screen (W x H)	1000 x 710 mm
Dimension Overall (L x W x H)	approx. 1150 x 880 x 175 mm
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Night dimming	Automatic
LED Matrix	Partial LED matrix
Approvals	Optical performance in compliance with EN-12966

## Control Unit

Radio remote control with feedback signal and LCD Display

## Optional Accessories

Connection Kit

Side holder for beacons

LED beacons

## Approvals:

