


MobiLED Garda Textbox ESH



Control Unit

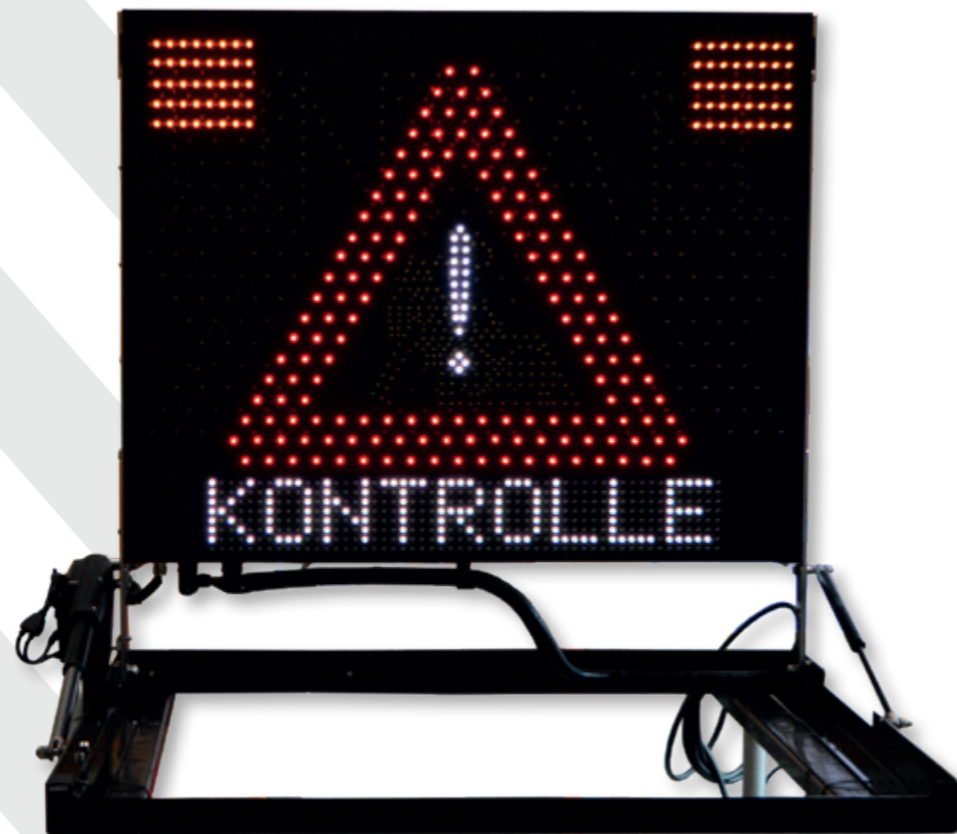

LED Display options

- »» Arrow pointing to the left or right
- »» Cross
- »» Traffic sign "Road Works Ahead"
- »» Traffic sign "Attention"
- »» Traffic sign "Queue Ahead"
- »» Traffic sign "No Overtaking"
- »» Traffic sign "No Overtaking for Trucks"
- »» 2 pcs. LED flasher synchro, amber
- »» 2 pcs. LED flasher synchro, blue

Technical Details

Technical Details Roof Warning Systems

Design	Roof mount, incl. lifting motor
LED-screen	Single sided
Weight	approx. 30 kg
Power consumption (day)	approx. 8 A max
Power consumption (night)	approx 0,8 A
Voltage	12 V DC
Dimension LED Screen (W x H)	800 x 600 mm
Dimension Overall (L x W x H)	approx. 1085 x 930 x 105 mm
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Night dimming	Automatic
LED Matrix	Partial LED matrix + Textbox Fullmatrix
Approvals	Optical performance in compliance with EN-12966

Control Unit

Radio remote control with feedback signal and LCD Display

Display Options Textbox

Dimension (WxH)	750 x 105 mm
Resolution	54 x 8 px
Pixel pitch	20 mm
LED colors	White
Programming	Freely programmable
Number of characters	Max. 9 characters

Optional Accessories

Connection Kit
Side holder for beacons
LED beacons

Approvals:

