


# MobiLED 80 x 48 ESH RGB



Control Unit

## Examples

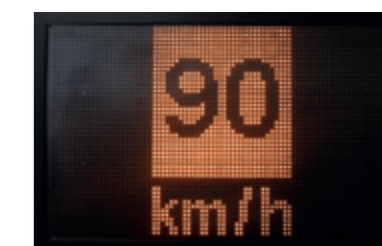

## Technical Details

### Technical Details Roof Warning Systems

Design	Roof mount, incl. lifting motor
LED-screen	Single sided
Weight	approx. 120 kg
Power consumption (day)	approx. 12,0 A max
Power consumption (night)	approx 2,0 A
Voltage	12 V DC
LED colors	RGB Fullcolor
LED matrix	Fullmatrix
Programming	Freely programmable
Dimension LED Screen (W x H)	1600 x 960 mm
Resolution (W x H)	80 x 48 px
Pixel pitch	20 mm
Image design	Paint or LED-Image Tool (*.bmp)
Night dimming	Automatic
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Approvals	Optical performance in compliance with EN-12966

### Control Unit

Radio remote control with feedback signal and LCD Display  
Standard hand remote control with feedback signal and LCD Display

### Optional Accessories

Connection Kit  
Side holder for beacons  
LED beacons

### Approvals:

