


MobiLED MINI ESF




Control Unit

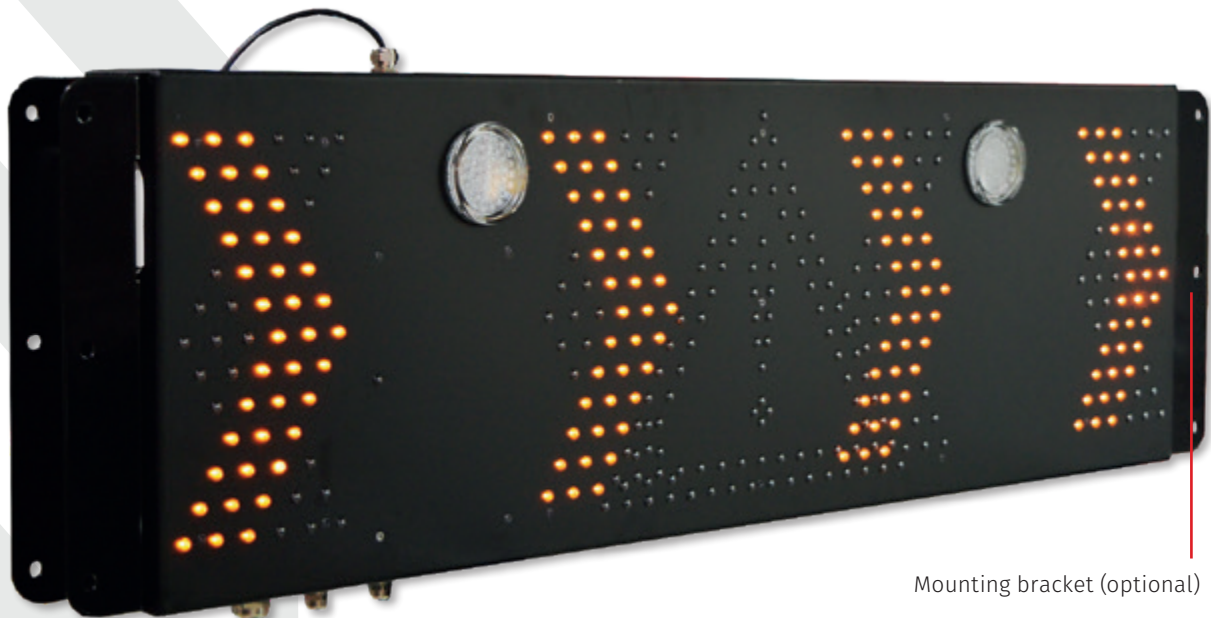

Mounting bracket (optional)

Examples

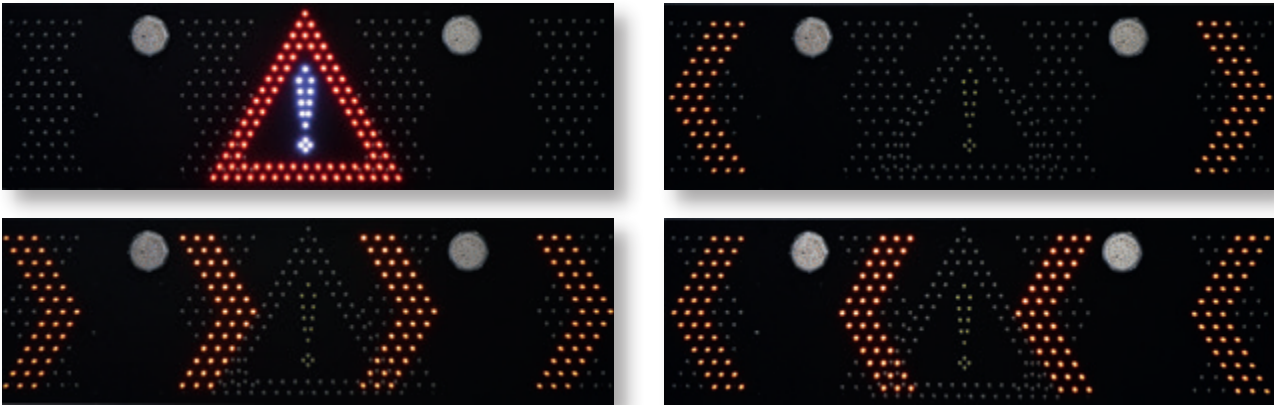

LED Display options

- » 4-fold sequential arrow pointing to the left or right
 - » Arrow pointing to the left and right
 - » Traffic sign "Attention"
 - » 2 pcs. LED lamps Ø 60mm, in compliance with EN 12352 cl. L2H
- LED lamps available in amber or blue color (Choose when order)

Technical Details

Technical Details Warning System

Design	Fixed installation
LED-screen	Single sided
Weight	approx. 10 kg
Power consumption (day)	approx. 2 A max
Power consumption (night)	approx 0,2 A
Voltage	12 V DC
Dimension LED Screen (W x H)	1000 x 300 mm
Dimension Overall (L x W x H)	approx. 1005 x 430 x 165 mm
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Night dimming	Automatic
LED Matrix	Partial LED matrix
Approvals	Optical performance in compliance with EN-12966

Control Unit

Radio remote control with feedback signal and LCD Display

Optional Accessories

- Connection Kit
- Cable connection for beacons
- Mounting bracket short left/right
- Mounting bracket long top/ bottom

Approvals:

