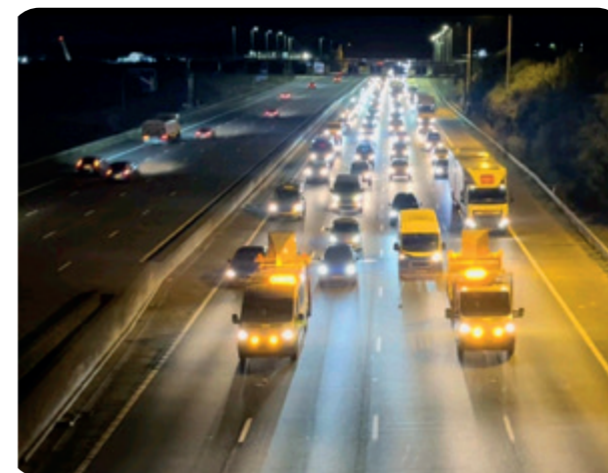


**MobiLED** EMCC

mobiLED


**LED Display options**

- »» Arrow pointing to the left (amber)
- »» Arrow pointing to the right (amber)
- »» Cross (red)
- »» 4 pcs. LED flasher (red) synchro
- »» 4 pcs. LED flasher (red) alternating left and right

## Technical Details

**Technical Details Warning System**

Design	Fixed installation
LED-screen	Single sided
Weight	approx. 15 kg
Power consumption (day)	approx. 4 A max
Power consumption (night)	approx 0,4 A
Voltage	12 V DC
Dimension LED Screen (W x H)	1100 x 900 mm
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Night dimming	Automatic
LED Matrix	Partial LED matrix
Approvals	Optical performance in compliance with EN-12966

**Control Unit**

Radio remote control with feedback signal and LCD Display

**Optional Accessories**

Connection Kit  
 Side holder for beacons  
 Mounting bracket side/ top

**Approvals:**
