


MobiLED 48 x 48 ESF



Radio remote control

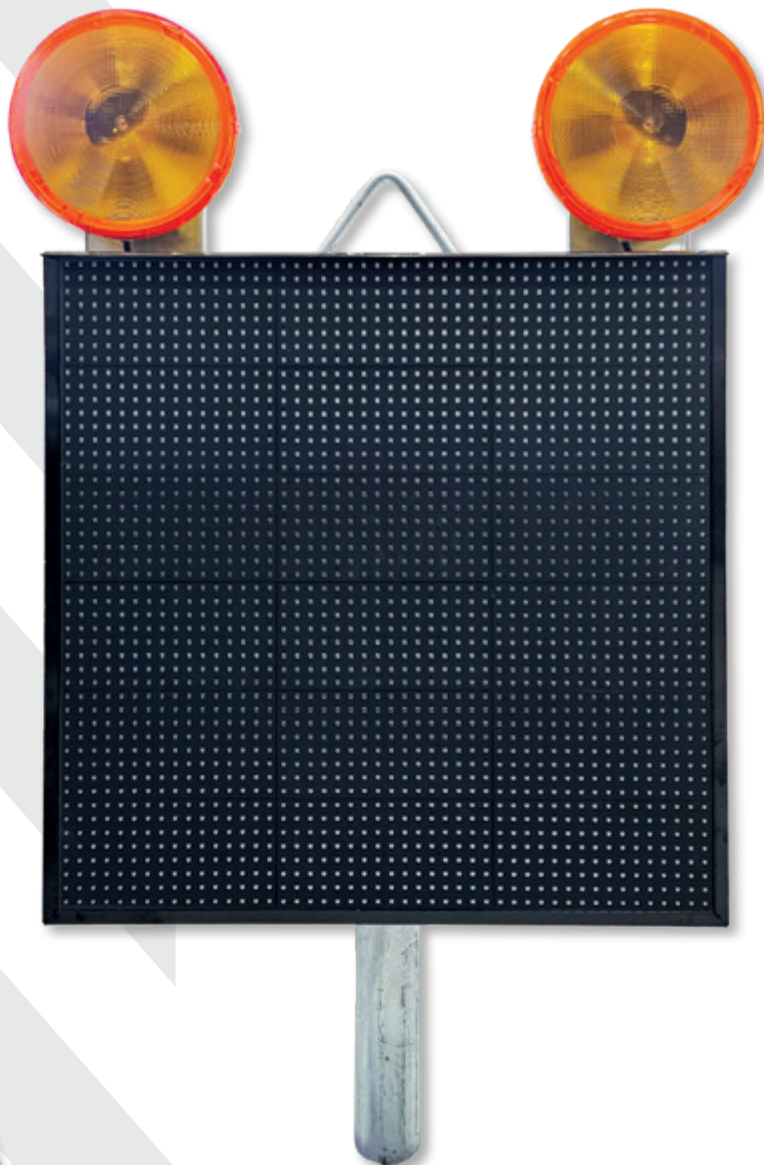

Examples



Technical Details

Technical Details Warning System

Design	Roof mount, incl. lifting motor
LED-screen	Single sided
Weight	approx. 30 kg
Power consumption (day)	approx. 7 A max
Power consumption (night)	approx 0,5 A
Voltage	12 V DC
LED colors	RGB Fullcolor
LED matrix	Fullmatrix
Programming	Freely programmable
Dimension LED Screen (W x H)	960 x 960 mm
Resolution (W x H)	48 x 48 px
Pixel pitch	20 mm
Image design	Paint or LED-Image Tool (*.bmp)
Night dimming	Automatic
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Approvals	Optical performance in compliance with EN-12966

Control Unit

Radio remote control with feedback signal and LCD Display
Standard hand remote control with feedback signal and LCD Display
G.T.M.S. - Global Traffic Management System

Optional Accessories

Connection Kit
Cable connection for beacons
Side holder for beacons
LED beacons
Mounting bracket short left/right
Mounting bracket long top/ bottom

Approvals:

