


LED Warning Trailer AT



Control Unit



Examples

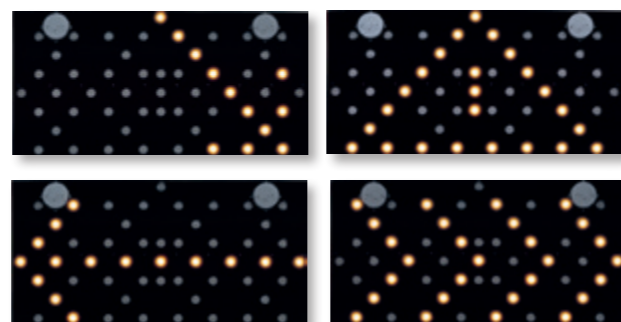

Technical Details

Technical details Vehicle

Max. permissible weight	750 kg
Empty weight	approx. 630 kg
Axles	Single axle trailer
Brake	Parking brake
Drawbar	Height adjustable, Knott
Hitch	DIN towing eye and ballpoint hitch
Support wheel	Foldable
Chassis	Galvanized steel or Stainless steel (Option)
Underride protection	With integrated vehicle illumination
Support legs (2 pcs.)	Hydraulic support, cranc support or fall support
Loading area	YES
Side Panels	YES
Batteries	2 pcs. 12V/ 230 AH
Battery charger	30A
Operation Voltage	12/ 24V (automatic)
Vehicle illumination	12V
Stability	85 km/h stand-alone
Vehicle title	EU (AT)

Control Unit

Control unit 1	Radio remote control with feedback signal (Optional)
Control unit 2	Controller installed on the trailer (Backup)

Technical details Warning Board

Warning board	In compliance with Austrian RVS
Approval LED-lamps	Compliant to EN-12352, Cl. L2H and Cl. L8H
Night dimming	Automatic
Traffic sign	Directional arrow adjustable by electronic actuator
Traffic sign foldable	"Working man" and "80 km/h"
Signage	Type RA2 red/ white or red/ yellow-fluorescent
Lifting/ Lowering	Hydraulic

Optional Accessories

LED beacon	
Overrun braking system	
Adapter plug 7pol 12V --> 13pol 12V	
Adapter plug 15pol 24V --> 13pol 12V	

