


# MobiLED MIS

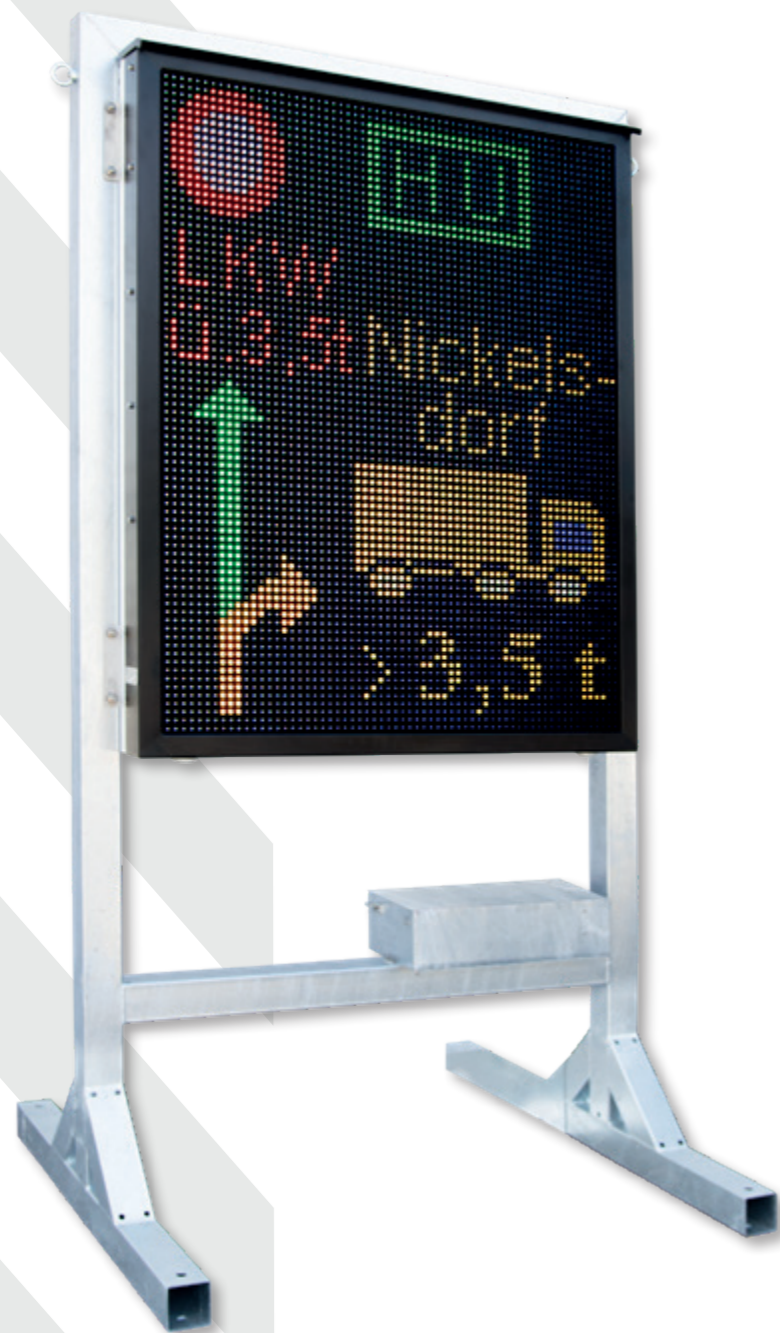

## LED Stand-Alone Systems

## LED Stand-Alone Systems

This variable message sign system stands out. It not only impresses with its size and resolution, but also offers various display options that can be used in many different applications. MobiLED MIS provides full flexibility. MobiLED MIS systems can conveniently be controlled through our web portal via smartphone, tablet or personal computer.

### Benefits

- » Flexible
- » Freely programmable
- » Strong frame system
- » Compact Design
- » Backup control unit on the VMS sign
- » Remote control via Internet



Control Unit



Control unit incl. G.T.M.S.



2 pcs. handling brackets (right/left)



Solid frame for easy installation.

## Technical Details

### Technical details mobiLED

Weight	260 kg
Frame	Galvanized steel
Battery box (L x B x H)	approx. 590 x 270 x 270 mm
Batteries	12V/ 230Ah (Optional)
Operation voltage	12V
Stability	85 km/h stand-alone

### Control Unit

Control unit 1	Radio remote control with feedback signal (Optional)
Control unit 2	Controller installed on the trailer (Backup)
Control unit 3	G.T.M.S - Global Traffic Management System (Optional)

### Technical details LED Message Board

Dimensions (WxH)	1280 x 1600 mm
Resolution	64 x 80 px
Pixel pitch	20 mm
LED colors	RGB Fullcolor
Programming	Freely programmable
Image design	Paint or LED-Image Tool (*.bmp)
Night dimming	Automatic
Temperature range	from -20°C to +60°C
Protection level	IP 54
Approvals	Optical performance in compliance with EN-12966

### Optional Accessories

G.T.M.S. - Global Traffic Management System
Radio remote control with feedback signal
Batteries 12V/ 230 Ah

