


LED VMS TMA Standard

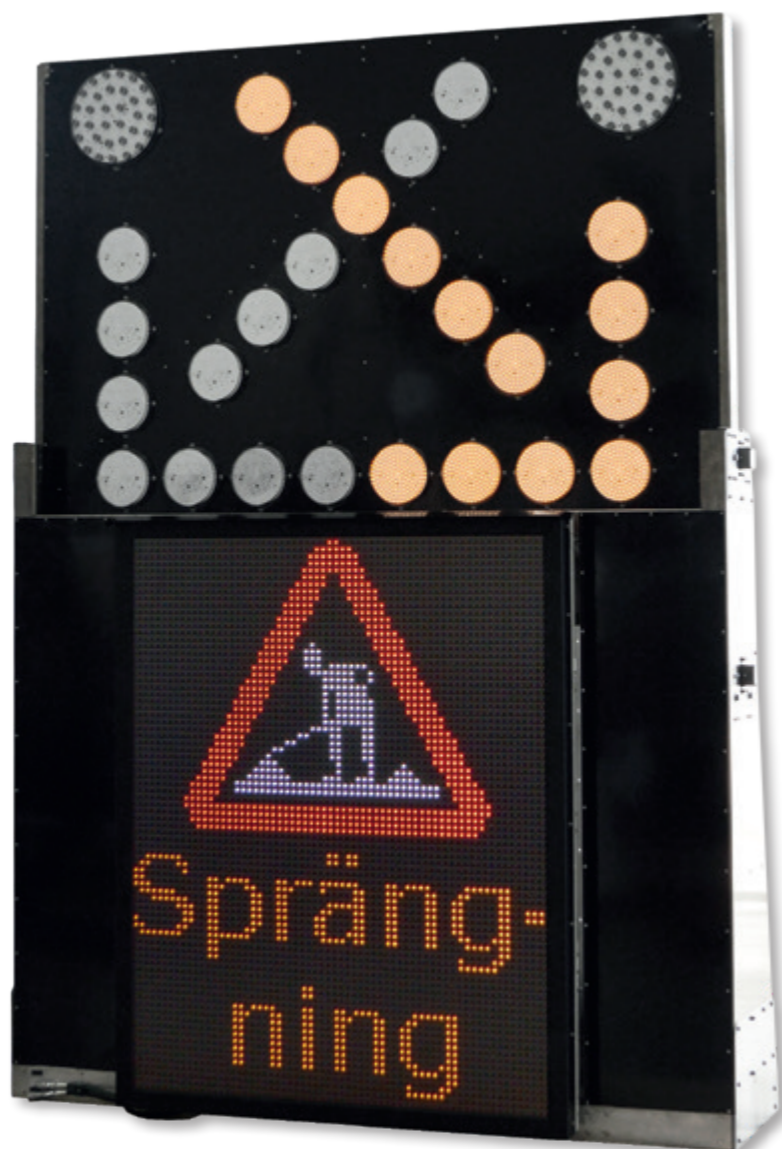

Technical Details

Technical details LED VMS Trailer

Weight	approx. 300 kg
Frame	Galvanized steel
Battery charger	30A incl. Charge Controller
Batteries	1 pcs. 12V/ 230 AH
Lifting/ Lowering Warning Board	Hydraulic
Lifting/ Lowering TMA	Hydraulic
Operation Voltage	12V

Control Unit

Control unit 1	Radio remote control with feedback signal (Optional)
Control unit 2	Controller installed on the trailer (Backup)

Technische Daten Weitwarneinrichtung

Warning lamps	2 pcs. LED warning lamps
Approval LED-lamps	Compliant to EN-12352, Cl. L9H/ L9M

Technical details Warning Lamps

Warning board	In compliance with German TL-Warnleuchten and TL-Absperrtafeln
Approval LED-lamps	Compliant to EN-12352, Cl. L8H and Cl. L9H/ L9M
Night dimming	Automatic

Technical details LED Message Board Rear

Dimensions (WxH)	1280 x 1600 mm
Resolution	64 x 80 px
Pixel pitch	20 mm

Technical details Message Board

LED colors	RGB Fullcolor
Programming	Freely programmable
Image design	Paint or LED-Image Tool (*.bmp)
Night dimming	Automatic
Temperature range	from -20°C to +60°C
Protection level	IP 54
Approvals	Optical performance in compliance with EN-12966

Optional Accessories

LED beacon	
G.T.M.S. - Global Traffic Management System	

