



MobiLED LP46 ESH

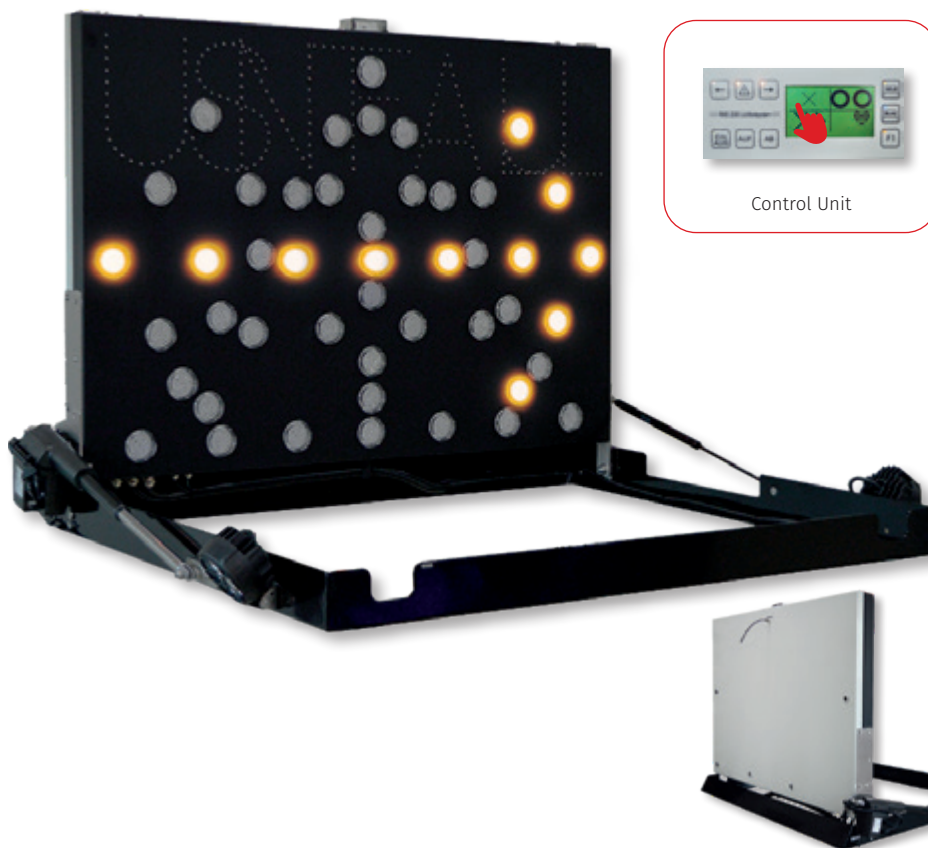

LED Display options

- »» 3-fold sequential arrow pointing to the left or right
- »» Vertical arrow pointing to the left or right
- »» Vertical arrow pointing to the left and right
- »» Traffic sign "Attention"
- »» Text message "UNFALL"
- »» Text message "STAU"

Examples Display options

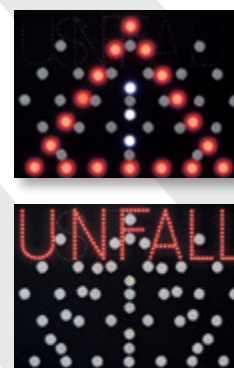

Technical Details

Technical Details Roof Warning Systems

Design	Roof mount, incl. lifting motor
LED-screen	Single sided
Weight	approx. 45 kg
Power consumption (day)	approx. 6 A max
Power consumption (night)	approx 0,6 A
Voltage	12 V DC
Dimension LED Screen (W x H)	1285 x 910 mm
Dimension Overall (L x W x H)	approx. 1440 x 1160 x 180 mm
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Night dimming	Automatic
LED-lamps	46 pcs. LED lamps Ø 60mm, in compliance with EN 12352 cl. L2H

Control Unit

Radio remote control with feedback signal and LCD Display

Optional Accessories

- Connection Kit
- Side holder for beacons
- LED beacons

Approvals:

