


MobiLED 48 x 48 DSH RGB



Examples

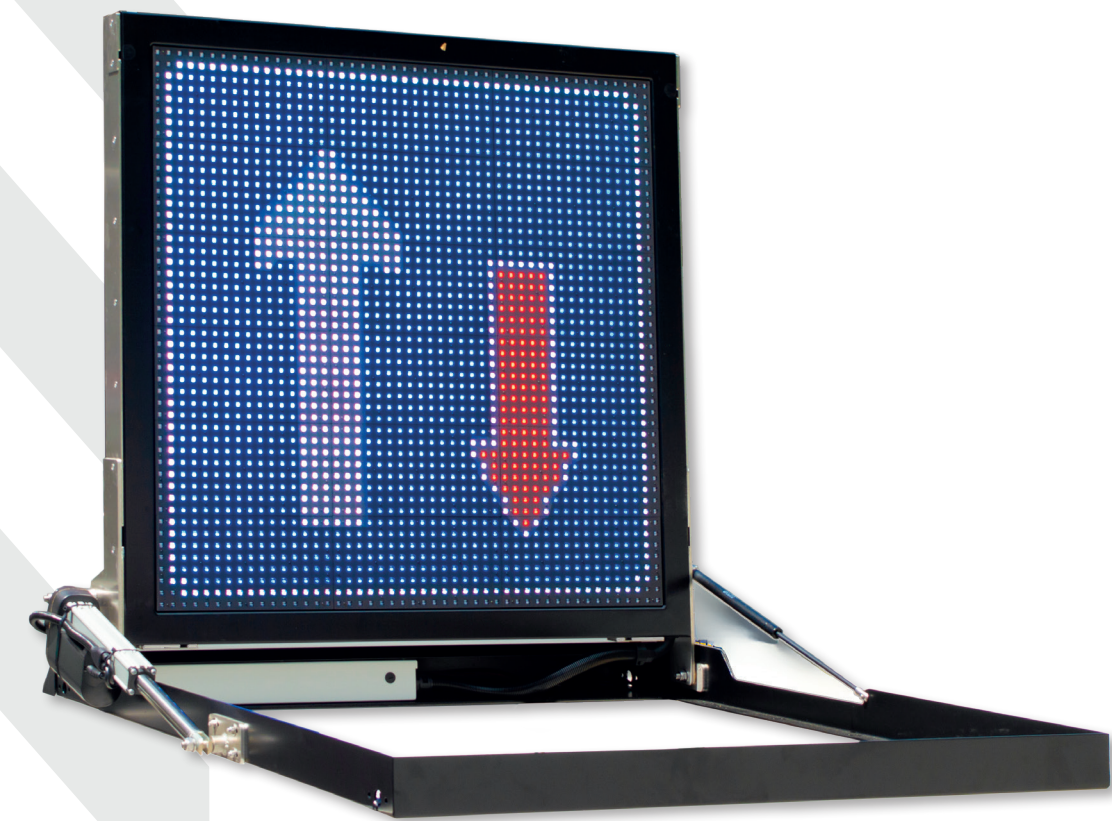

Technical Details

Technical Details Roof Warning Systems

Design	Roof mount, incl. lifting motor
LED-screen	Double sided
Weight	approx. 100 kg
Power consumption (day)	approx. 14 A max
Power consumption (night)	approx 1,0 A
Voltage	12 V DC
LED colors	RGB Fullcolor
LED matrix	Fullmatrix
Programming	Freely programmable
Dimension LED Screen Front/Rear (W x H)	960 x 960 mm
Resolution Front/Rear (W x H)	48 x 48 px
Pixel pitch	20 mm
Image design	Paint or LED-Image Tool (*.bmp)
Night dimming	Automatic
Temperature range	from -20° C to +60° C
Protection Level	IP 54
Approvals	Optical performance in compliance with EN-12966

Control Unit

Radio remote control with feedback signal and LCD Display

Optional Accessories

- Connection Kit
- Side holder for beacons
- LED beacons

Approvals:

